
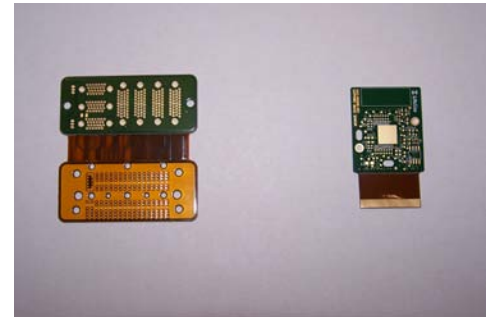


Rigid Flex Circuits

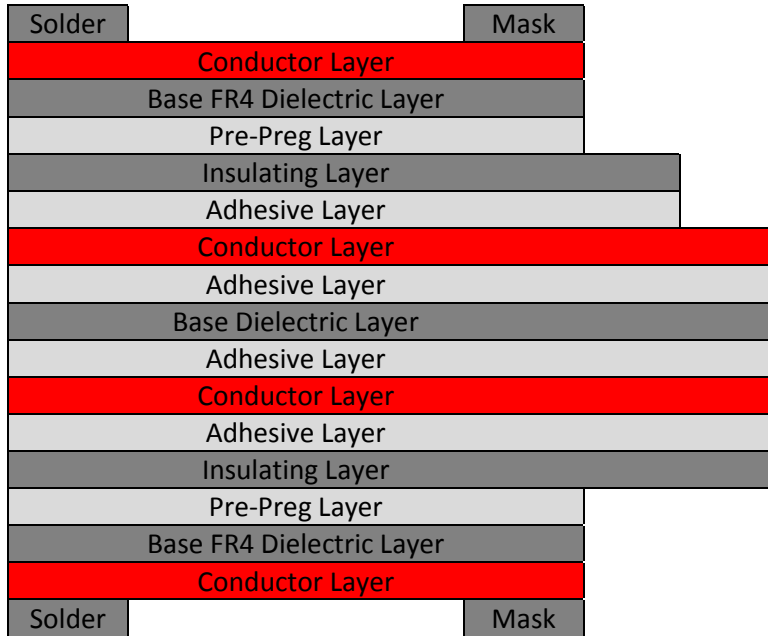

Rigid Flexible Circuits:

- ✓ Materials: Polyimide, FR4, G10, High Tg
- ✓ Minimum Trace/Space = 5 mil/5 mil STD, 3 mil/3 mil available
- ✓ Minimum Drilled Hole Size = .008" finished
- ✓ ½ oz, 1 oz, 2 oz copper thicknesses
- ✓ Immersion Tin, ENIG, Electrolytic Gold, Organic, HASL
- ✓ Silkscreen (White, Black, Yellow)
- ✓ PSA (multiple materials, thicknesses and adhesion properties)
- ✓ Stiffener materials = FR4, Polyimide, Aluminum, Copper, SS, Brass, etc.
- ✓ Zif connectors

Tramonto Circuits is a natural choice as your supplier of flexible circuits, rigid flex, printed circuit boards and assembly.